

TOLERANCE: ±0.05
RECOMMENDED PCB LAYOUT
(TOP VIEW)

材质说明:

- 1. 塑胶主体 : 耐高温尼龙树脂, 加玻璃纤维30%.
- 2. 端子: 磷铜, T=0.25.
- 3. 固定焊片: 黄铜合金, T=0.30 .

电镀要求:

- 1. 端子接触区域镀金 3u" min. ;焊接区域镀锡80u" min. 镍底 50u" min.
- 2. 固定焊片表面镀锡80u" min.; 镍底50u" min. .

安规测试:


- 1. 产品符合 RoHS.

机械特性:

- 1. micro bit 与连接器插拔拔力 : 1Kg .
- 2. 插拔寿命: 1500次.


电气特性:

- 1. 额定电压: 250V AC.
- 2. 额定电流: 1AMP .
- 3. 接触阻抗 : 30 mΩ .
- 4. 绝缘阻抗 : 1000 MΩ, 500V DV.
- 5. 耐电压 : 500V 1Minute .

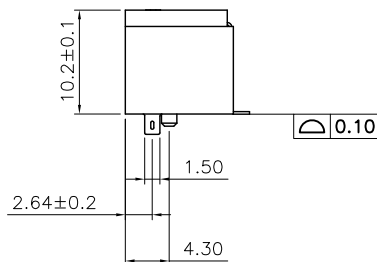

■ 表示焊接区域

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	17\11\28	AW	WK

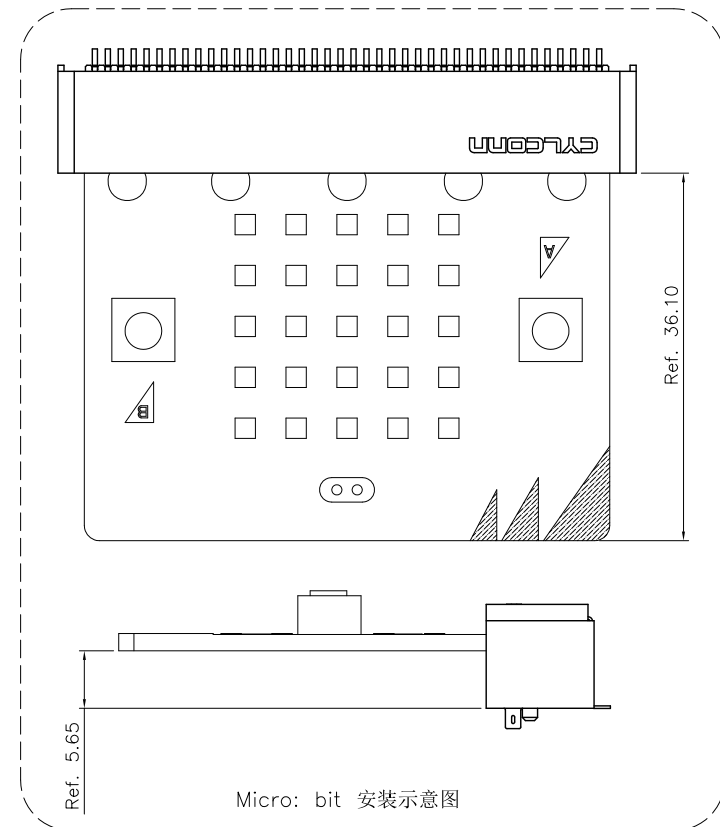

白色	MIC127-140-002
黑色	MIC127-140-001
塑胶颜色	PART NUMBER (料号)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. WU	2017\11\28	东莞市宇亮电子有限公司 DONG GUAN YU LIANG ELECTRONICS CO., LTD	
DIMENSIONS: mm		CHEK S. CHIEN	2017\11\28		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD Abel	2017\11\28	NAME Micro Bit-connector_40p 90度 SMT	
THIRD ANGLE PROJECTION		PRODUCT SPEC	—	SIZE A4	DRAWING No. YL-ED-OXXXX
0 PLC ± 0.50		WEIGHT	—	CUSTOMER DRAWING	
1 PLC ± 0.30		SCALE 1 : 1		SHEET 1 of 1	
2 PLC ± 0.20					
3 PLC ± 0.15					
4 PLC ± -					
ANGLES ± 3°					