


Using the Traffic Light Gizmo with Playground for Crumble

Requirements:

- Playground for Crumble with Crumble attached and batteries installed
- Traffic Light Gizmo
- 3 x Connection cable

Connections:

1. Switch Playground OFF
2. Plug 3 connection cables into Gizmo and Pin A, B and C on Playground
3. Switch Playground ON

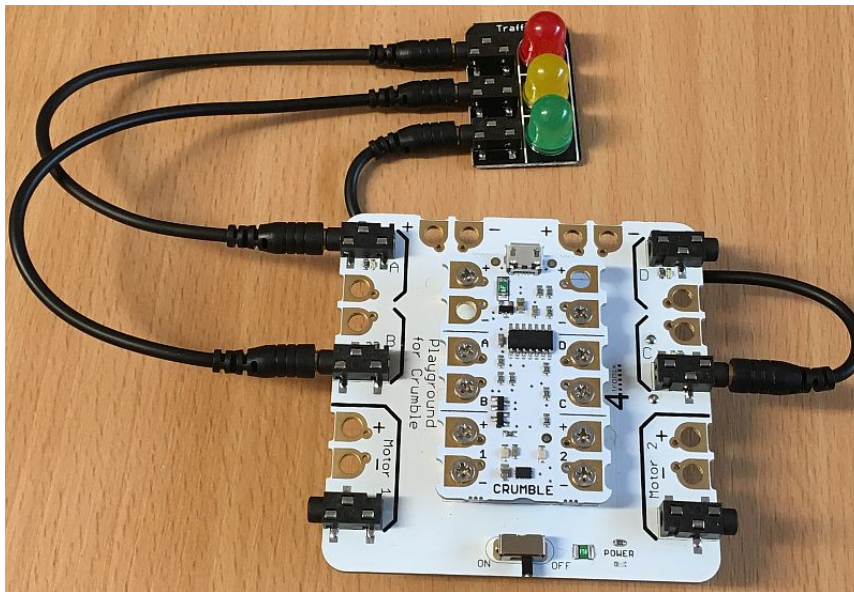

Simple Software Demo:

This is a very simple Traffic Light sequence.

```

program start
do forever
  set A HI
  wait 3 seconds
  set B HI
  wait 1 seconds
  set A LO
  set B LO
  set C HI
  wait 3 seconds
  set C LO
  set B HI
  wait 1 seconds
  set B LO
loop
  
```